



Furlong Flooring®

First choice flooring for every room

SUNEX PRODUCT SPECIFICATION

PRODUCT INFORMATION		PRODUCT SPECIFICATION	
Collection		Sunex	
Type		Laminate	
Dimensions		1205mm (L) x 197mm(W)	EN 13329 +A1
Thickness		8mm	EN 13329+A1
Packaging -Piece		10 pieces / 1 package	
M ²		2.374 m ²	
KG		16kg	
Pallet -Piece		48 Package / 1 Pallet	
M ²		142,44 m ²	
KG		975kg	
Class		31	EN 13329 +A1
Abrasion resistance		AC3	EN 13329 +A1
Thickness swelling %		≤18	ISO 24336
Resistance to Impact	Small Ball N	≥8	EN 13329 +A1
	Large Ball mm	≥500	
Warranty Domestic/Commercial		10/5	
Resistance to Staining		Min5 (group 1 & 2) Min.4 (group 3)	EN 438-2_5
Surface Soundness	N/mm ²	≥1.0	EN 13329+A1
Lock Strength L/W	kN/m	-	ISO 24334
Effect of Castor Chair	25.000 cycles	No damage	EN 425:2002
Effect of Furniture Leg		No damage	EN 424
Opening between Elements		≤0,20	EN 13329 +A1
Height difference between elements		≤0,15	EN13329+A1
Moisture Content %		4-10	EN 322
Fire Resistance Class		C _f s1	EN 923-1



**PALLET
RANGE
ONLY**



Furlong Flooring®
First choice flooring for every room

SUNEX PRODUCT SPECIFICATION

COLOURS	ITEM
Jawa	A72366
Malaga	A72367
Merida	A72369
Muson	A72368



Water Resistant - up to
24 Hours




Sustainably Sourced



Eco friendly flooring



Uniclic® click system
for faster installation.

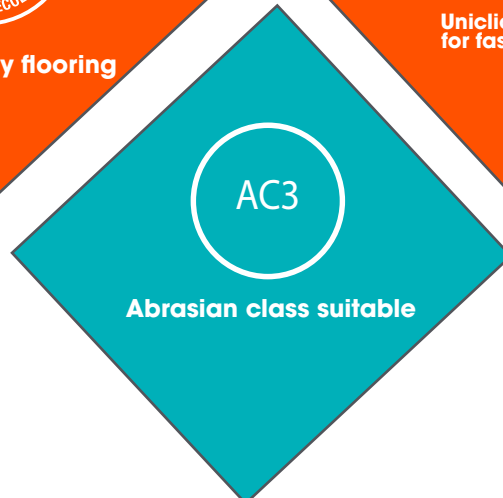

Abrasion class suitable



DARTFORD
01322 628700
PRESTON
01772 316155

STONEHOUSE
01452 228480
DUBLIN
+353-1-4092000



Alternatively, visit furlongflooring.com
or email enquiries@furlongflooring.com

Follow us on

