



AURORA PRODUCT SPECIFICATION

PRODUCT DIMENSIONS	PLANK	HERRINGBONE	SQUARE TILE	MEDIUM TILE
Width	196mm	158mm	493mm	493mm
Length	1320mm	632mm	493mm	986mm
Number of panels per pack	14	24	14	10
m ² per pack	3.62m ²	2.4m ²	3.4m ²	4.86m ²
Weight per pack	15.09kg	9.97kg	14.16kg	20.27kg


PRODUCT INFORMATION	PRODUCT SPECIFICATION	
Construction	PVC	
Thickness	2.5mm	EN ISO 24346:2006-10
Wear Layer	0.55mm	EN ISO 24340:2012-02
Wear Layer Treatment	Superguard Pride®	
Thermal Resistance /Tog Rating	0.01m ² K/W / 0.1 TOG	EN 12667:2001-01
Suitability	Class 23- Heavy Domestic Class 33-Heavy Commercial	EN ISO 10874
Inflammability	Bfl-S1	EN 13501-1:2018
Scratch Resistance	MSR-A1, MSR-B1	EN ISO 16094
Squareness & Straightness	≤400mm: ≤0.25mm >400mm: ≤0.35mm	EN ISO 24342:2018-11
Slip Resistance	DS/R10	EN 13893:2002-11
Residual Indentation	Norm ≤0.1mm Average production result: 0.05 mm	EN ISO 24343-1:2012-01
Furniture Leg Resistance	No visible damage	EN ISO 16581:2019-06
Curling	Norm ≤ 2mm. Result OK	EN ISO 23999:2021-11
Dimensional stability	Norm: ≤ 0.25% Average result measured: ≤0.05 %	EN ISO 23999:2021-11
Formaldehyde Group	E1	EN 717-1:2004-10
Acoustic Insulation	3 dB	ISO 717-2
Castor Chair Resistance	No damage to wear layer, no delamination	ISO 4918:2016-03
Stain Resistance	OK	EN 438-2:2016+A1:2018-12
Light Fastness	Class ≥ 6	ISO 105-B02:2014-09
Underfloor Heating	Suitable, max 27°C.	EN12524
Warranty	25 Year Residential 10 Year Commercial	





AURORA PRODUCT SPECIFICATION

COLOURS	TILES	PLANKS	Herringbone
Thassos Stone (Square)	46506		
Thassos Stone (Medium Tile)	46506		
Tuscany Stone (Square)	46537		
Tuscany Stone (Medium Tile)	46537		
Theodore Oak		84227	84227
Olive Oak		84312	84312
Heathland Oak		83273	83273
Laguna Oak		83853	83853
Freya Oak		53256	53256
Bayla Oak		53452	53452
Truckee Oak		82871	82871

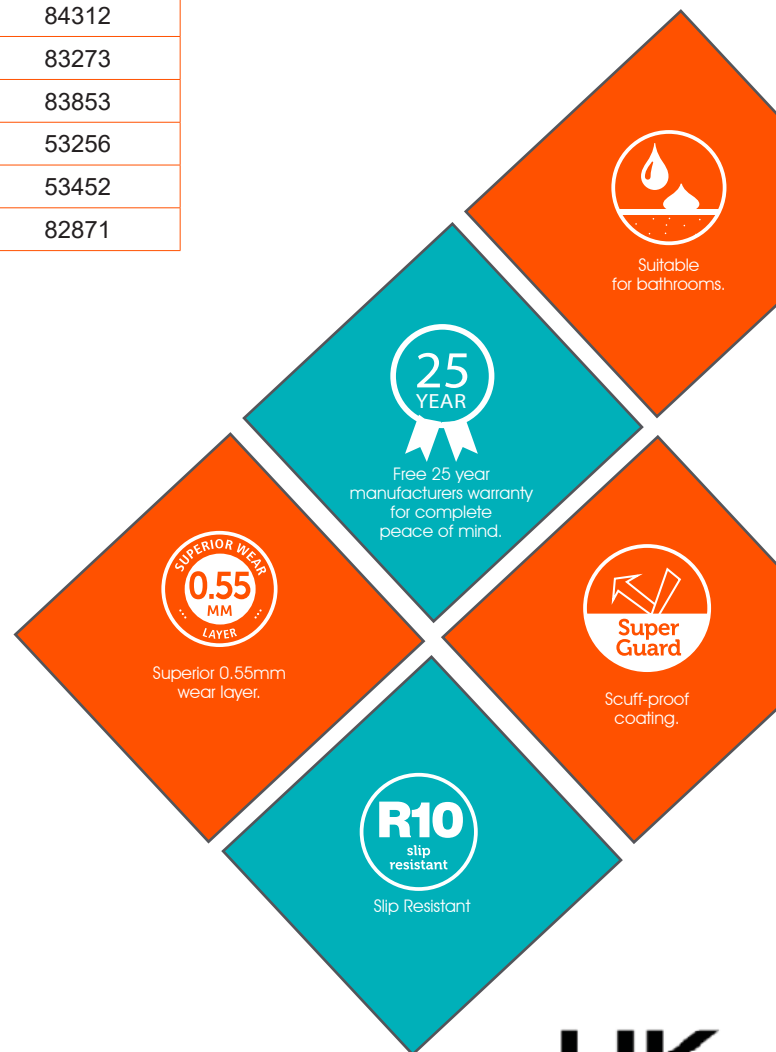

ÉMISSIONS DANS L'AIR INTÉRIEUR
A+
A+ A B C



EN 14041:2004 / ACI:2006
Heterogeneous PVC Floorcoverings
ISO 10542:2018



DARTFORD
01322 628700
PRESTON
01772 316155

STONEHOUSE
01452 228480
DUBLIN
+353-1-4092000



Alternatively, visit furlongflooring.com
or email enquiries@furlongflooring.com

Follow us on

